

48" x 40" Collapsible Bulk Container

Repairable all-plastic latches

Optional sidewall doors for easy access, available on either the 48" or 40" sidewalls



"U-Channel" ribbing delivers superior load handling strength up to 1,800 lbs.

Bottom runners facilitate easy conveyability

4-way forklift and pallet jack access streamlines handling and transport

Textured areas facilitate clean application and removal of adhesive labels, without tearing or leaving behind residue

Accommodates RFID tag insertion for improved lot tracking and traceability

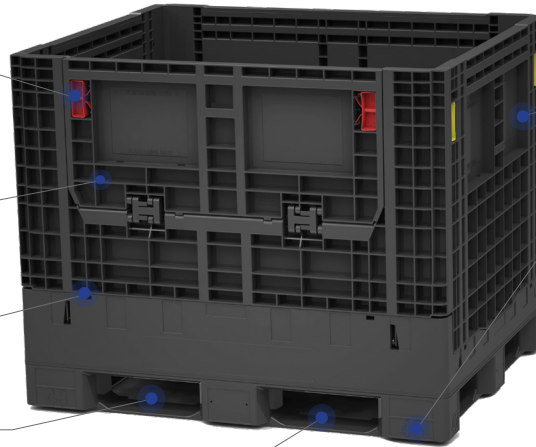


TC 4840-2-IM with optional latches

Additional Features:


- » 48" x 40" footprint ideal for food processing and general distribution applications — Available in FDA approved material
- » High pressure injection molded design delivers strength and durability with smooth surfaces
- » Available in 34" or 39" height options, and optional side doors on 48" or 40" sides
- » Two-piece compression and heat-welded base offers best strength-to-weight ratios
- » Industry leading foldable design fits 240 units on a 53' truck, offering efficient return shipping and storage
- » Optional ventholes promote airflow, maintain desired temperature, and facilitate sprinkler evacuation for automated warehouse systems
- » 100% Recyclable and available in recycled material

Specifications:


Model	Outside Dimensions (inches)			Inside Dimensions (inches)			To Fill Line (inches)	Height Collapsed (inches)	Weight (lbs)	Volume (cubic ft)	Trailer Qty Opened	Trailer Qty Collapsed
	L	W	H	L	W	H						
BC 4840-34	48.0	40.0	34.0	45.0	37.0	27.9	27.3	13.6	106.2	26.3	90	240
BC 4840-39	48.0	40.0	39.0	45.0	37.0	32.9	32.3	13.6	116.0	31.1	60	240
TC 4840-2-IM	48.5	40.5	1.4	n/a	n/a	n/a	n/a	n/a	11.7	n/a	n/a	3,540

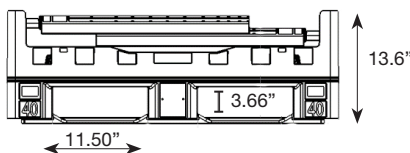

Short side collapsed

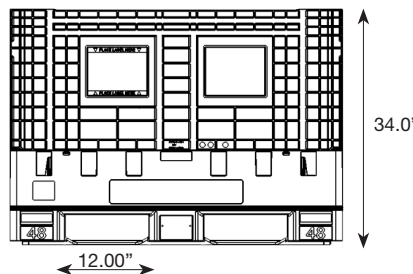

34" height long side erect

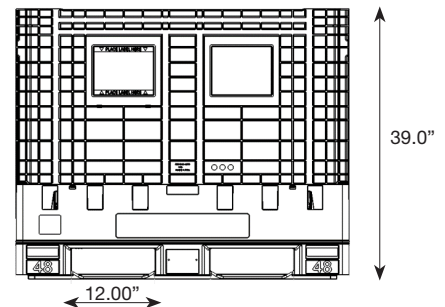

39" height long side erect



Monoflo International
882 Baker Lane, Winchester, VA 22603
Call 540-771-3077

miworldwide.com



defining what comes next.